



Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

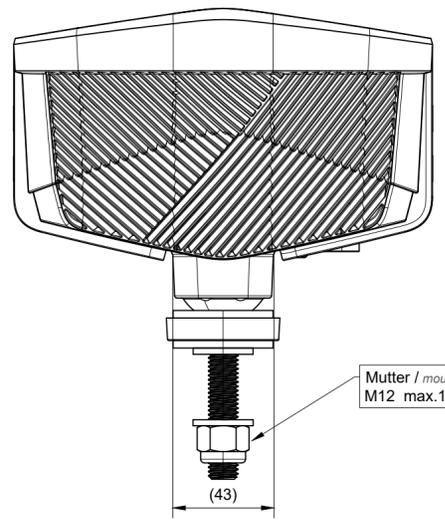


Mutter / mounting nut  
M12 max.10Nm

(43)



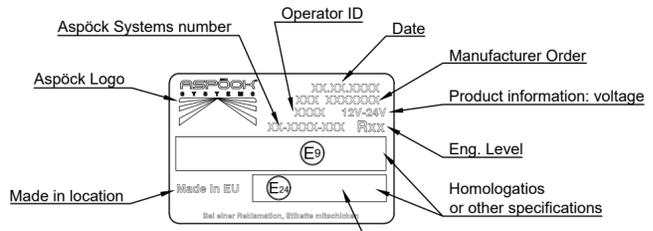


Detail View: A  
H.3

6p. DT male	
FUNCTION	PIN
Masse GND	1
Abblendlicht low beam	2
Fernlicht high beam	3
Frontposition RH front position RH	4
Frontblinker RH front direction indicator RH	5
Tagfahrlicht DRL	6

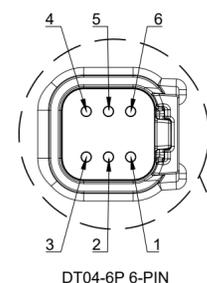

DT04-6P 6-PIN

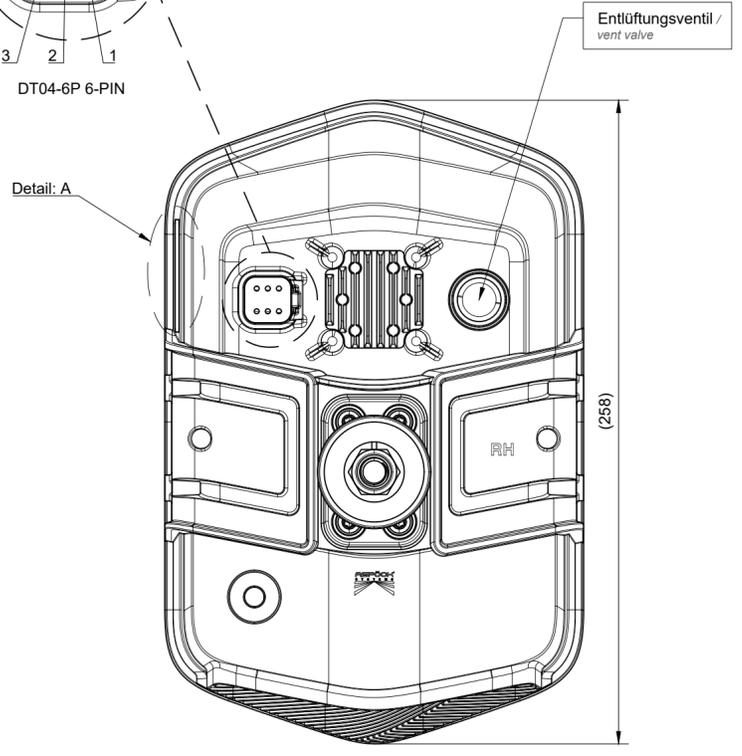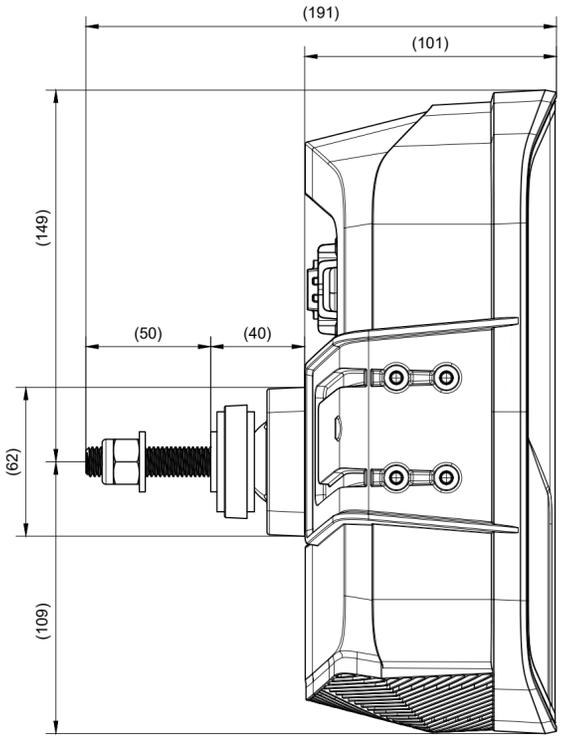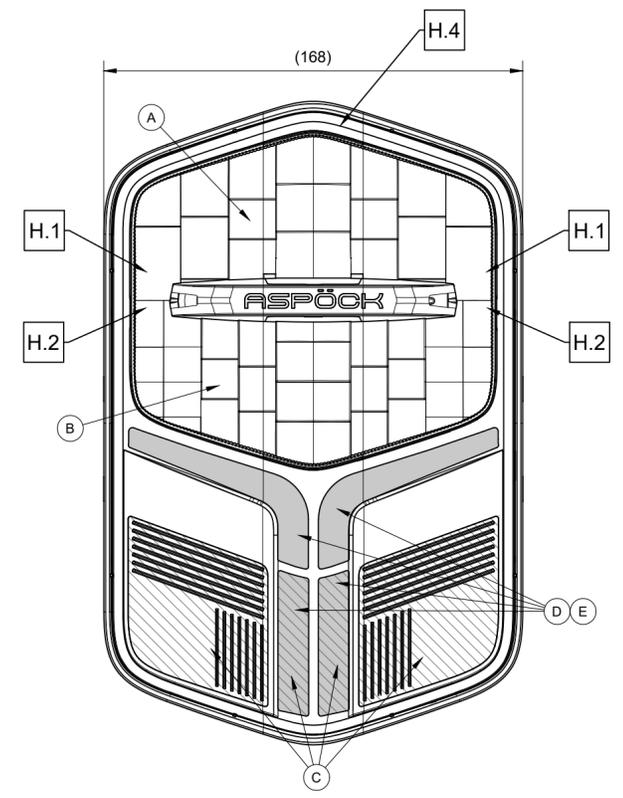

Entlüftungsventil /  
vent valve

Detail: A

CCC CISPR 25 class 3

Homologation description					
H.1	E9 1939	149R 01	12.5	WCR-DS PL	
H.2	E9 23409	148R 01	RL	A	1a
H.3	E24 6483	10R 06			
H.4	SAE I7 DRL PA F5 H 25 DOT				

Einbaurichtung /  
mounting direction



FUNCTION:	
Abblendlicht low beam	A
Fernlicht high beam	B
Frontblinker RH front direction indicator RH	C
Frontposition RH front position RH	D
Tagfahrlicht Daytime Running Lights	E

Electrical Specification				
Funktion Function	Nennspannung Nominal Voltage	Spannungsbereich Voltage Range	Nennstrom Nominal Current	Nennleistung Nominal Power
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Low Beam	12V / 24V	10V - 33V	0.9A / 0.46A	12.1W / 12.8W
High Beam	12V / 24V	10V - 33V	0.9A / 0.46A	12.1W / 12.8W
Frontposition	12V / 24V	10V - 33V	0.14A / 0.07A	1.8W / 1.9W
Front DI	12V / 24V	10V - 33V	0.98A / 0.42A	13.2W / 11.7W
DRL	12V / 24V	10V - 33V	0.65A / 0.33A	8.7W / 9.2W

CP\_03-0\_Bemaßungsrichtlinie ( ) Auxiliary dimension DIN 406-10 Theoretical dimension ISO 1101  
 ○ Test dimension (SPC) [ ] Unfinished dimension DIN 406-10 ✓ Surface quality ISO 1302

Designed by Livinchi Gabriela 2026/01/30 Checked by Strubreiber Daniel 2026/02/06 Approved by Schamberger Stefan 2026/02/09

Part Number 25-0420-077

**ASPOCK SYSTEMS**  
 Designation: LuxLEDII V DRL DT CISPR25/3 RH  
 Drawing Nr. 25042007  
 Business Unit SALES - 12


Tolerance CP\_04-2\_Toleranzen Verkabelungsprodukte

Project number 1220

Weight - Scale not in scale  
 Level R01 Sheet 1 / 1

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

A2 - AutoCAD 2023 / CP\_03-0\_Zeichnungsblatt Beschreibung

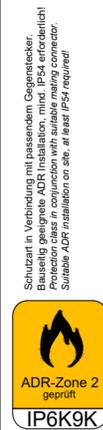

Schutzart in Verbindung mit passendem Gegenseite.  
 Bauseitig geeignete ADR Installation, mind. IP54 erforderlich!  
 Protection class in conjunction with suitable mating connector.  
 Suitable ADR installation on site, at least IP54 required!