
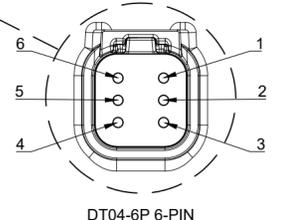
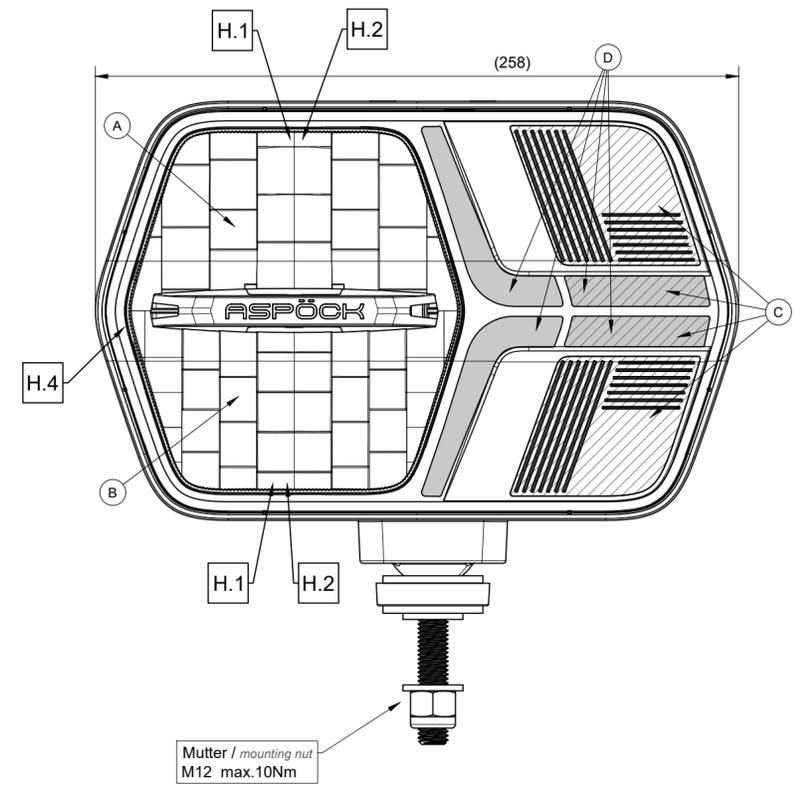
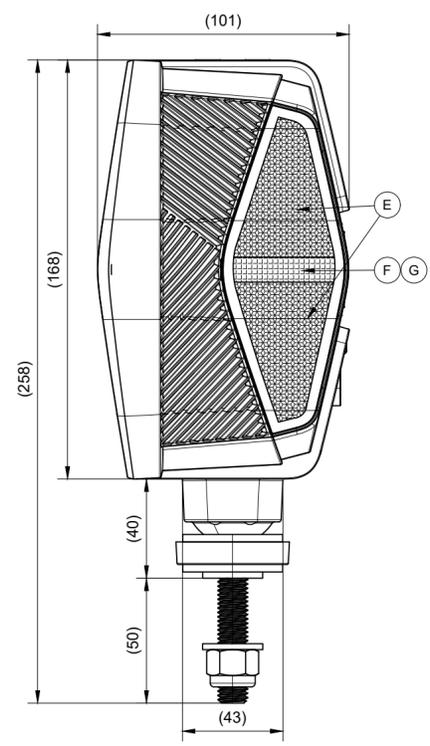
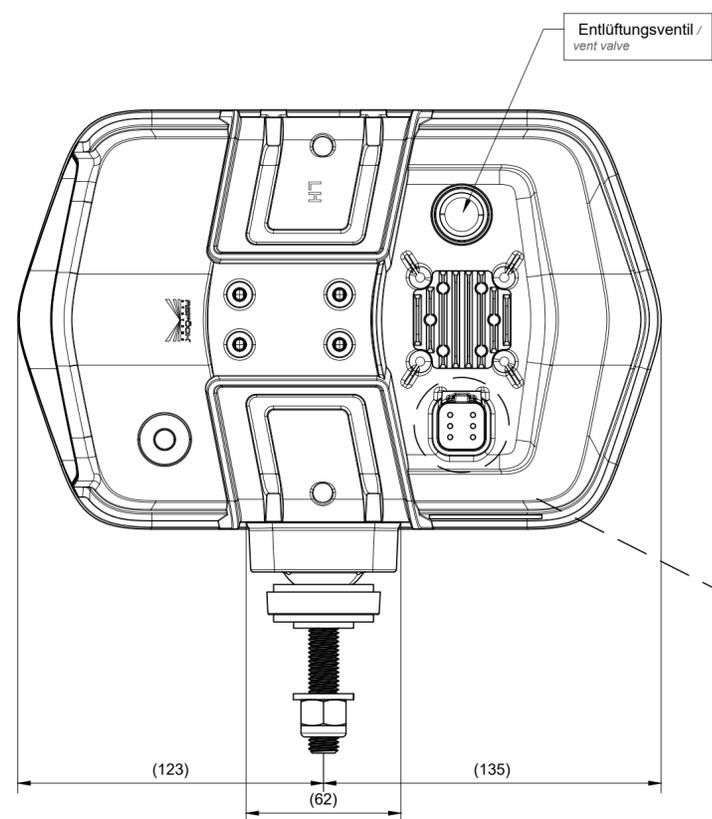
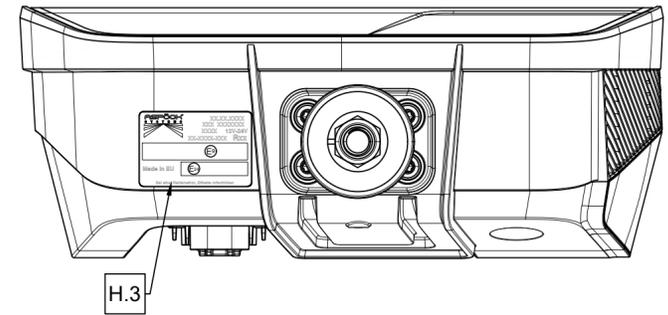


Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

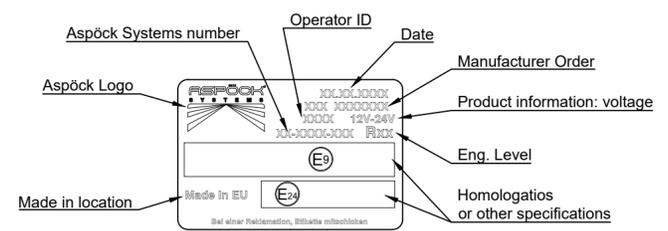


6p. DT male	
FUNCTION	PIN
Masse <i>GND</i>	1
Abblendlicht <i>low beam</i>	2
Fernlicht <i>high beam</i>	3
Frontposition / SML LH <i>front position / SML LH</i>	4
Blinker LH <i>Front DI / Side DI LH</i>	5
NO FUNCTION	6

Mutter / mounting nut
M12 max.10Nm

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Low Beam	12V / 24V	10V - 33V	0.9A / 0.46A	12.1W / 12.8W
High Beam	12V / 24V	10V - 33V	0.9A / 0.46A	12.1W / 12.8W
Frontposition	12V / 24V	10V - 33V	0.14A / 0.07A	1.8W / 1.9W
Front DI	12V / 24V	10V - 33V	0.98A / 0.42A	13.2W / 11.7W
Side DI / SML	12V / 24V	10V - 33V	0.08A / 0.09A	1W / 2.5W

FUNCTION:	
Abblendlicht <i>low beam</i>	A
Fernlicht <i>high beam</i>	B
Front blinker LH <i>front direction indicator LH</i>	C
Frontposition LH <i>front position LH</i>	D
Reflektierende Fläche <i>reflex reflector area</i>	E
Seitenmarkierung <i>side marker amber</i>	F
Seiten blinker LH <i>side direction indicator LH</i>	G

Homologation description					
H.1	E9 1938	149R 01	12.5	WCR-DS PL	
H.2	E9 23409	148R 01	A	1a	5 SM1
		150R 01	IA		
H.3	E24 6483	10R 06			
H.4	SAE I7 PA F5 H 25 DOT				

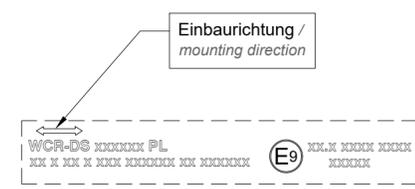

Schutzart in Verbindung mit passendem Gegenstecker.
 Baueinheit geeignete ADR Installation, mind. IP54 erforderlich!
 Protection class in conjunction with suitable mating connector.
 Suitable ADR installation on site, at least IP54 required!



CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10 Theoretical dimension ISO 1101
 ○ Test dimension (SPC) [] Unfinished dimension DIN 406-10 Surface quality ISO 1302

Designed by Livinchi Gabriela 2026/01/30 Checked by Strubreiter Daniel 2026/02/06 Approved by Schamberger Stefan 2026/02/09

Part Number 25-0421-047

ASPOECK SYSTEMS
 Designation: LuxLEDII H SML DT CISPR25/3 LH
 Drawing Nr. 25042104
 Business Unit SALES - 12

Project number 1220

Tolerance CP_04-2_Toleranzen Verkabelungsprodukte

Weight - Scale not in scale

Level R01 Sheet 1 / 1

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

A2 - AutoCAD 2023 / CP_03-0_Zeichnungsblatt Beschreibung