

25W LED Arbeitsscheinwerfer

MODEL : WDWL-9R25W Serie






Input Voltage	10~36V DC
Current Draw(12V)	2.1A
Wattage(MAX)	25 Watt
Operating Temperature	- 40°C~80°C
IP Rating	IP68K
Weight	450(g)
Luminous Flux (Measured_20W)	1860 lm (1390lm)
Housing Color	Black
LED Lifetime	50,000 Hours
Vibration Rating	15G

- WDWL-9R25W10 : 25-Watt 10° Ultra Narrow Beam Square
- WDWL-9R25W25 : 25-Watt 25° Narrow Beam Square
- WDWL-9R25W40 : 25-Watt 40° Wide Beam Square
- WDWL-9R25W : 25-Watt 60° Ultra Wide Beam Square

Cable Reference

DT : deutsch / BD : Binder / AM : AMP

- Aluminiumdruckgussgehäuse für maximale Wärmeableitung
- Optimal einstellbare Halterung
- Seitenleitwerke maximieren die Wärmeableitung
- Geringer Stromverbrauch
- Polycarbonat-Linse
- CIPSR25 Stufe 5 Test-Pass

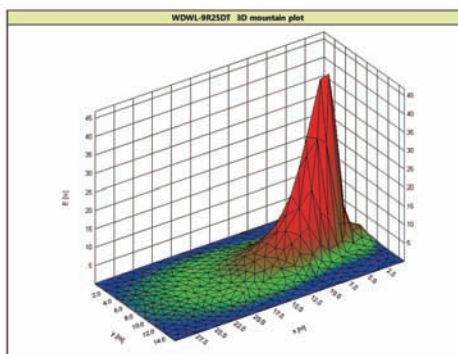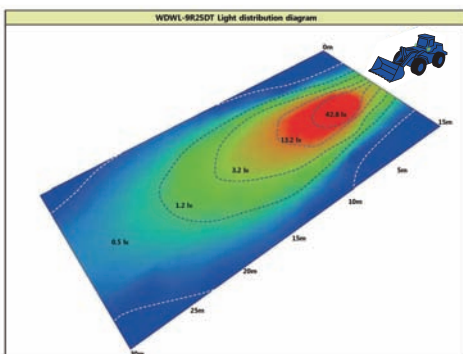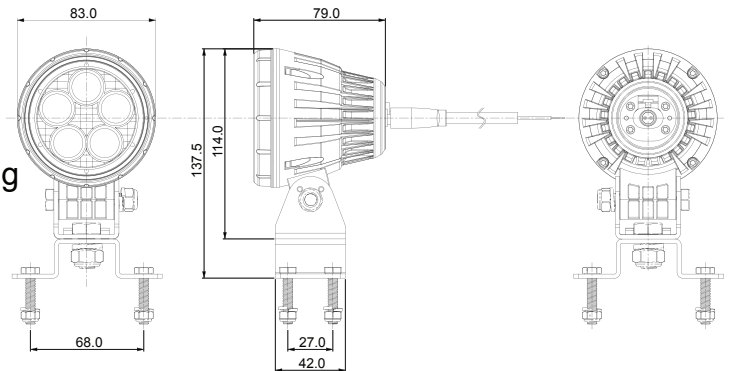

Light distribution (h: 2.5 - 15°)

