





1000HD13

12 Volt flasher

- Standard ISO Terminals
- Unique Tank Circuit Controller
- High Temperature Plastic Enclosure
- Separate Pilot Light Output Terminal
- Functions in Forward or Reverse Polarity




Application

- ALL 12 VOLTS FLASHER APPLICATIONS
 - For 3 terminal ISO Style Flasher Applications
 - For 1 to 10, 21 Watt, 12 Volt Lamps




Design Life

- 200 Hours Turn Signal, 36 Hours Hazard

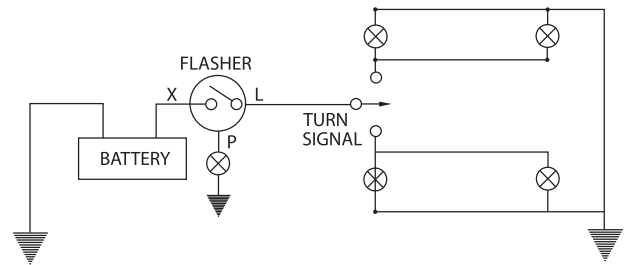

Technology vs design life vs lamp load

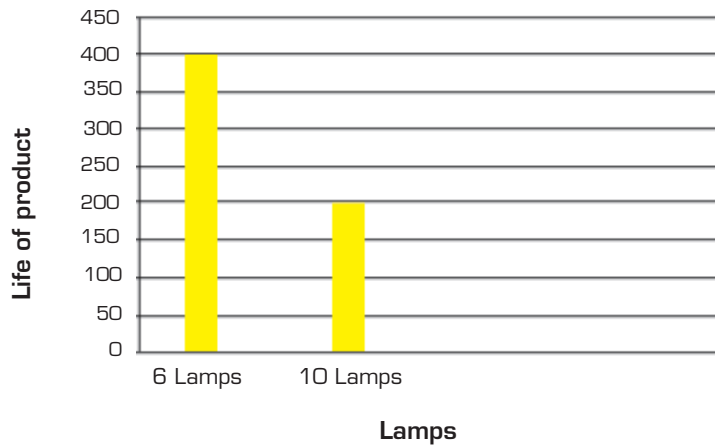

Characteristic	Min	Max	Unit
Load Rating	1	10	Lamps
Flash Rate	60	120	Flash/min
Duty Cycle	35	75	%
Time to 1st Flash		.75	Seconds
Voltage Drop		0.45	V @ Max Load
Voltage Range	11	15	Volts
Temperature Range	0	125	Degrees C

>address

Triscan a/s
Engmarken 11
DK-8220 Brabrand
Denmark

>contact

Phone +45 8622 5811
Fax +45 8622 5877

>contact

email auto@triscan.dk
www.triscan.com